


Purchase order number:

Cylinder capacity:

Operating pressure:
Mains/Medium/Low


Construction:
Stainless/Copper

Extras:
Wet back connections
Boiler coil
Solar coil

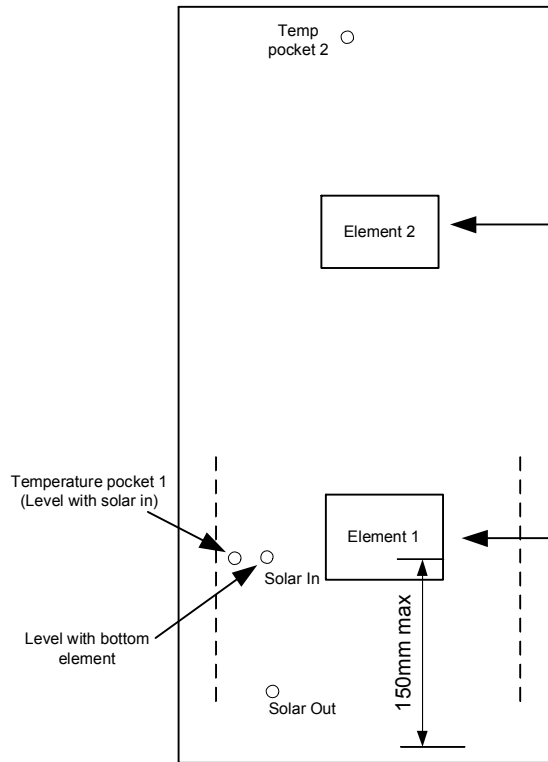

Element 2 position:
1/3 of cylinder volume above element. (+/- 5 litres)

Element 1 Position:
150mm from cylinder bottom - as per G12.
(Volume of water beneath cylinder to be no more than 20% of total cylinder volume.)

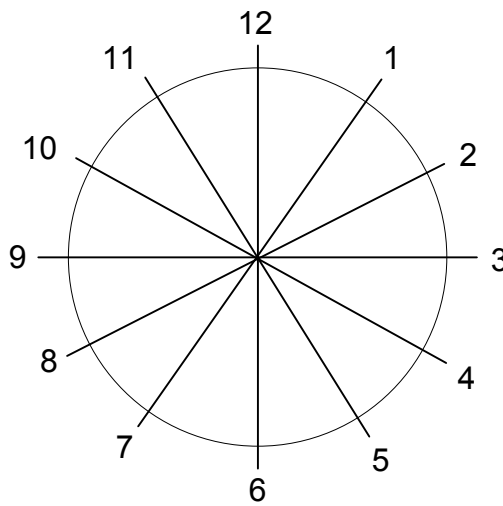

**Top
Bottom**

Position of Ports:

Element 1	6
Element 2	6
TPR	_____
Main Inlet	_____
Main Outlet	_____
Solar Inlet (Level with bottom element)	_____
Solar Outlet	_____
Temperature pocket 1 (Bottom)	_____
Temperature pocket 2 (Top)	_____
Boiler Coil Inlet (Height & Position)	_____
Boiler Coil Outlet (Height & Position)	_____